
# 8' MI-BOX CONTAINER

# 7'2"wide X 8'-4"high X 7'-10" long




# **Floor Structure**

- > 2 angles 3" X 2" X 3/16"
- > 2 end tubes 4" X 3" X 1/8"
- > 1 | Beams 2-1/4" X 4" X 1/8"
- > 2 lifting tubes 6" X 3" X 1/8"



#### **Roof Structure**

- > 3" X 3" X 3/16" perimeter angles
- ➤ 4 custom roof gussets 3/16"
- > 2 roof bows @ 24" from ends
- Pre-punched perimeter holes for wall panels.




## **Wall Section**

Custom formed lower rail / 10 gauge Pre-punched alignment holes to attach to base.

### **Roof Section**

- Custom corner brackets
- > Custom formed gussets

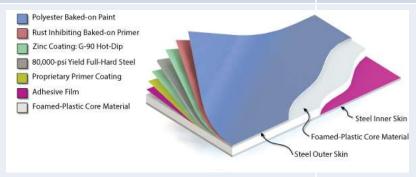

Composite Wall Panels